


REVISION				
ZONE	REV	DESCRIPTION	DATE	APPROVED
-	-	-	-	-

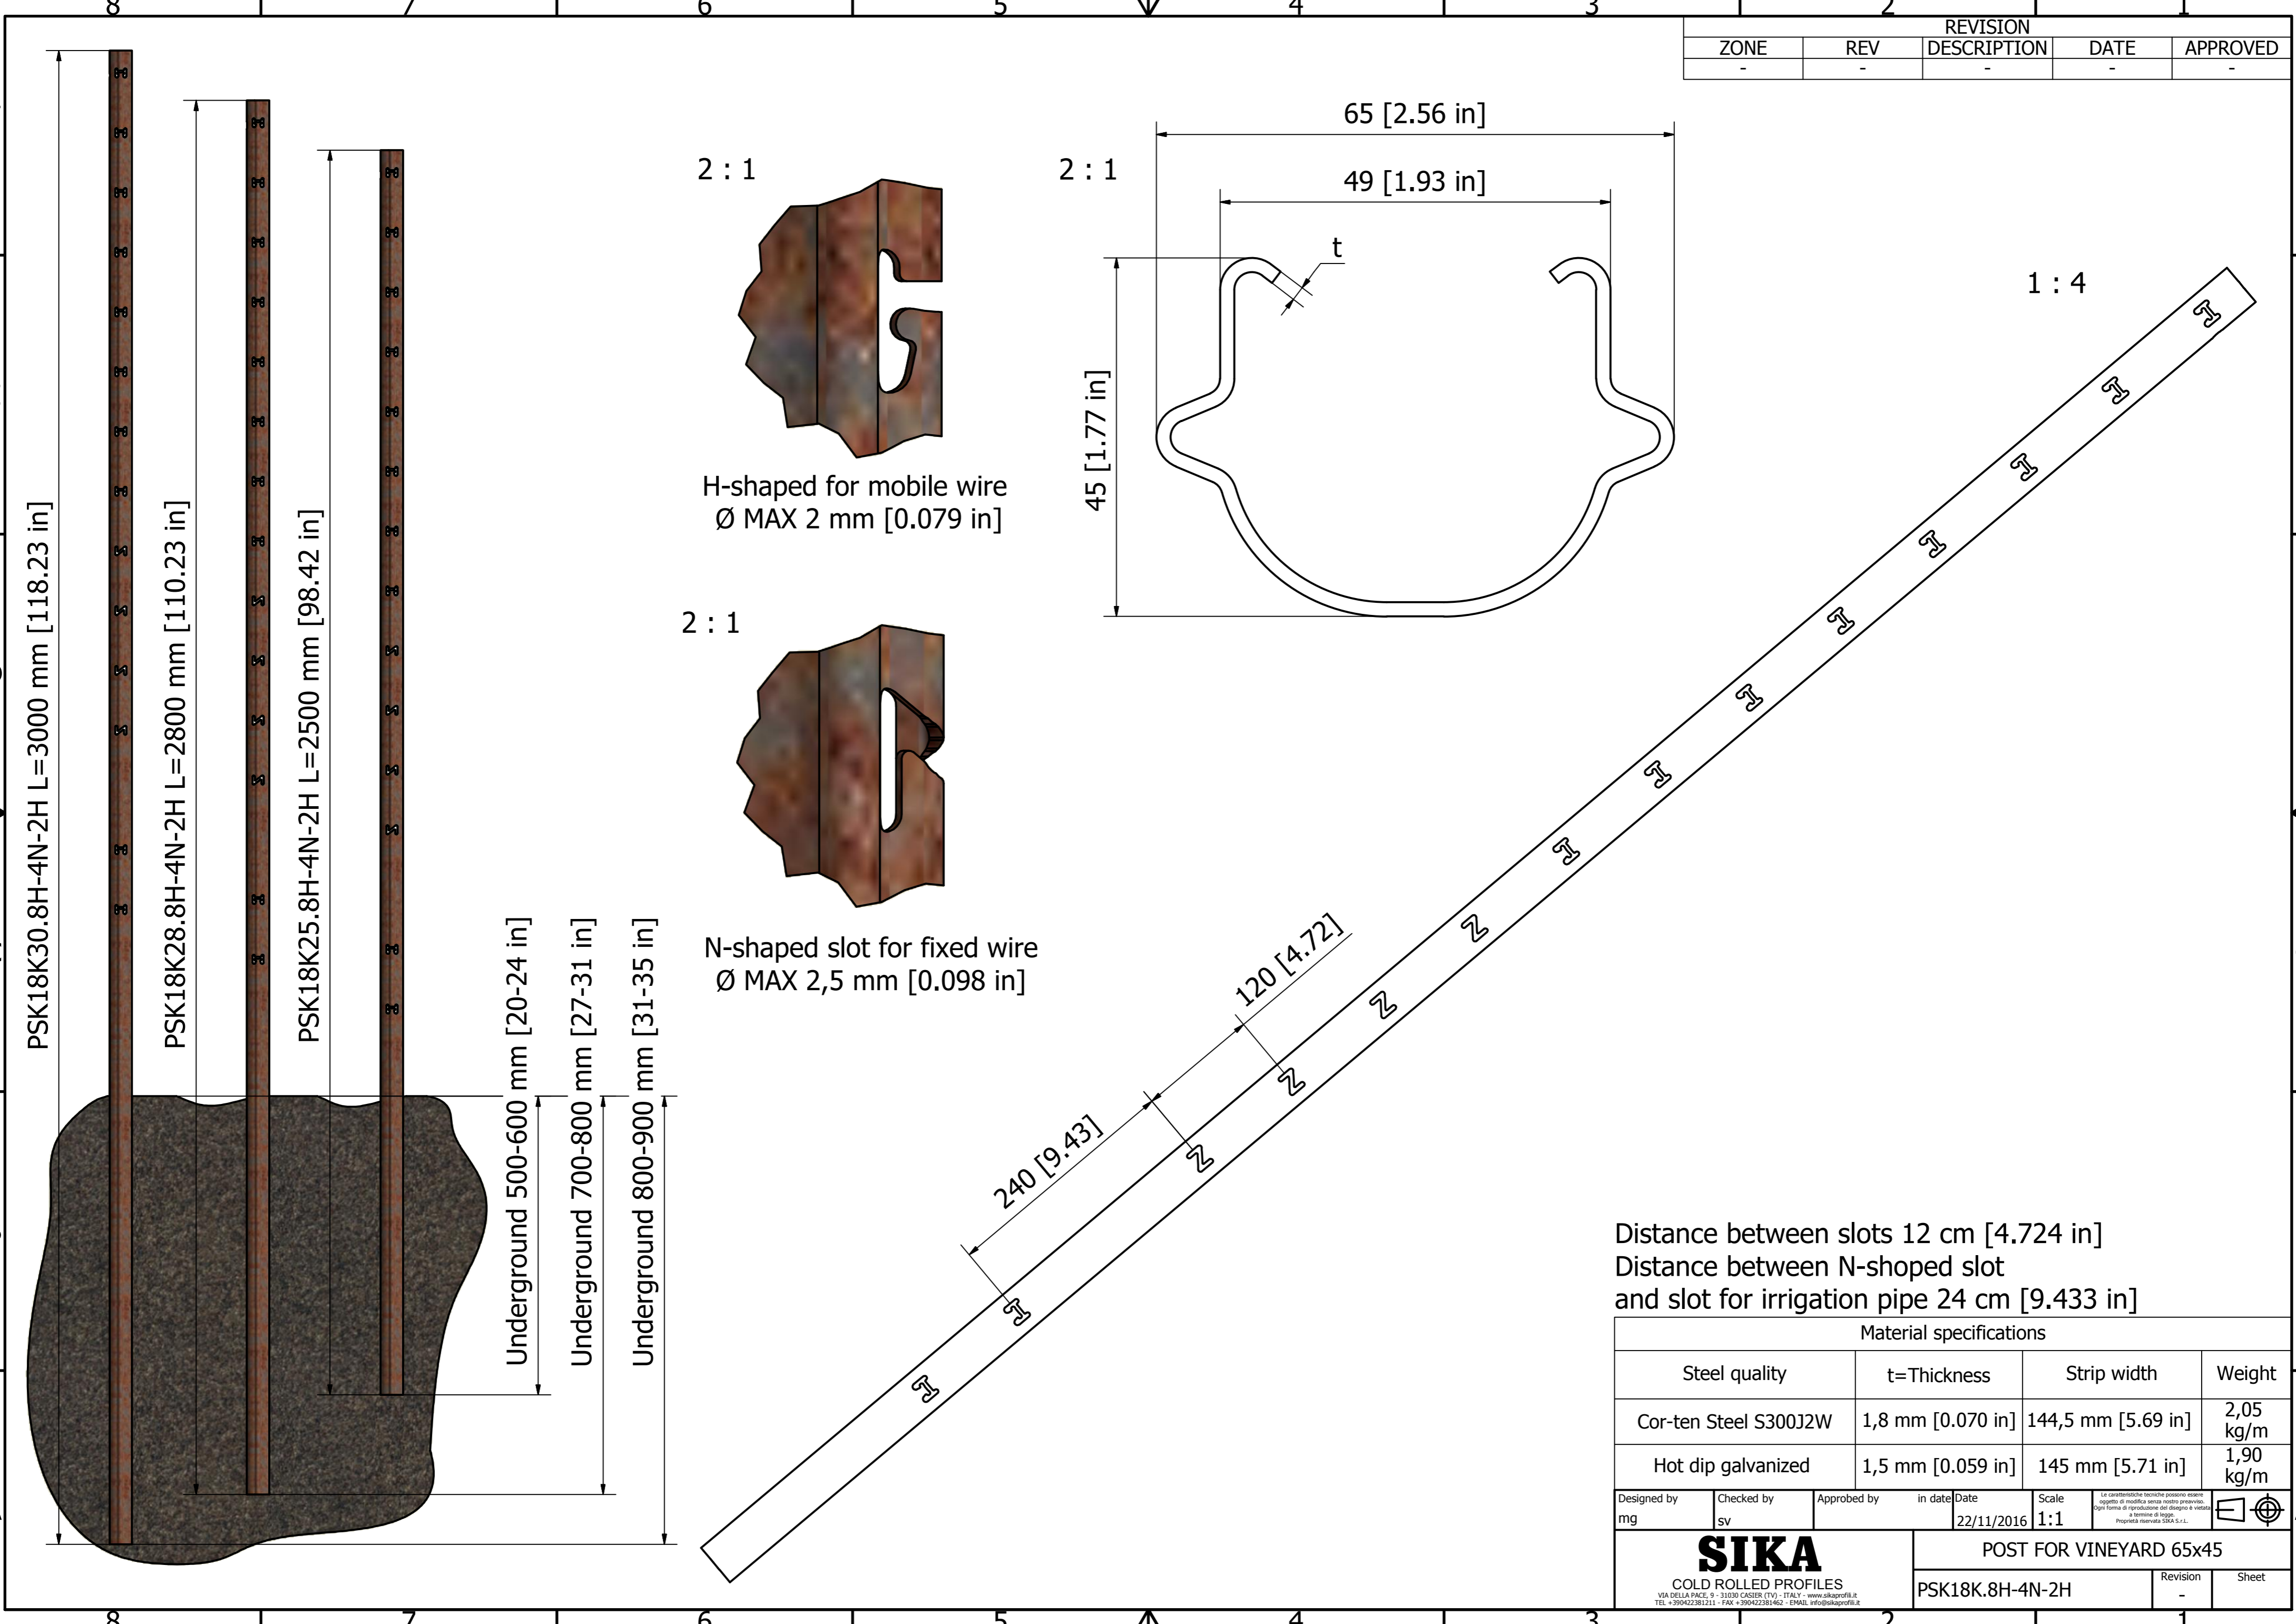

PSK18K30.8H-4N-2H L=3000 mm [118.23 in]  
 PSK18K28.8H-4N-2H L=2800 mm [110.23 in]  
 PSK18K25.8H-4N-2H L=2500 mm [98.42 in]

Underground 500-600 mm [20-24 in]  
 Underground 700-800 mm [27-31 in]  
 Underground 800-900 mm [31-35 in]

H-shaped for mobile wire  
 Ø MAX 2 mm [0.079 in]

N-shaped slot for fixed wire  
 Ø MAX 2,5 mm [0.098 in]

Distance between slots 12 cm [4.724 in]  
 Distance between N-shaped slot  
 and slot for irrigation pipe 24 cm [9.433 in]

Material specifications			
Steel quality	t=Thickness	Strip width	Weight
Cor-ten Steel S300J2W	1,8 mm [0.070 in]	144,5 mm [5.69 in]	2,05 kg/m
Hot dip galvanized	1,5 mm [0.059 in]	145 mm [5.71 in]	1,90 kg/m

Designed by mg	Checked by sv	Approved by	in date Date 22/11/2016	Scale 1:1	Le caratteristiche tecniche possono essere oggetto di modifica senza nostro preavviso. Ogni forma di riproduzione del disegno è vietata. Proprietà riservata SIKA S.p.A.
<b>SIKA</b> COLD ROLLED PROFILES <small>VIA DELLA PACE, 9 - 31030 CASIER (TV) - ITALY - www.sikaprofil.it          TEL. +390422381211 - FAX +390422381462 - EMAIL info@sikaprofil.it</small>		POST FOR VINEYARD 65x45		Revision	Sheet
		PSK18K.8H-4N-2H		-	-